

HEAG 151

Digital converters (opto coupler transmitters) for signal level shifting, isolating and signal regeneration of HTL or TTL signals

Article number: 11087115

Overview

- Signal level shifting from TTL → TTL
- Isolating signal cables to multiple receivers to avoid earth loops
- Regenerating of signals when transmitting over long distance



Technical data

Technical data - electrical ratings

Voltage supply	5 VDC ±5 %
Consumption	≤5 mA
Inputs	TTL
Input signals	K1 90° K2, K0 + inverted
Input frequency	200 kHz
Outputs	TTL
Load current (outputs)	HTL: 60 mA (average), 100 mA (peak) TTL: 25 mA (average), 75 mA (peak)

Technical data - electrical ratings

Output signals	K1, K2, K0 + inverted
----------------	-----------------------

Technical data - mechanical design

Dimensions W x H x L	50 x 75 x 55 mm
Protection EN 60529	IP 20
Operating temperature	-20...+50 °C
Mounting type	DIN rail housing EN 50022
Connection	Screw terminal connector

HEAG 151

Digital converters (opto coupler transmitters) for signal level shifting, isolating and signal regeneration of HTL or TTL signals


Article number: 11087115

Terminal assignment

Terminal	Assignment
1 *	Do not use
2	Do not use
3	Input K1
4	Input $\overline{K1}$ (K1 inverted)
5	Input K2
6	Input $\overline{K2}$ (K2 inverted)
7	Input K0 (zero pulse)
8	Input $\overline{K0}$ (zero pulse inverted)
9	Do not use
11	+UB (HEAG)
12 *	0 V
13	Output K1
14	Output $\overline{K1}$ (K1 inverted)
15	Output K2
16	Output $\overline{K2}$ (K2 inverted)
17	Output K0 (zero pulse)
18	Output $\overline{K0}$ (zero pulse inverted)
19	Do not use

* No connection between 1 and 12

Dimensions

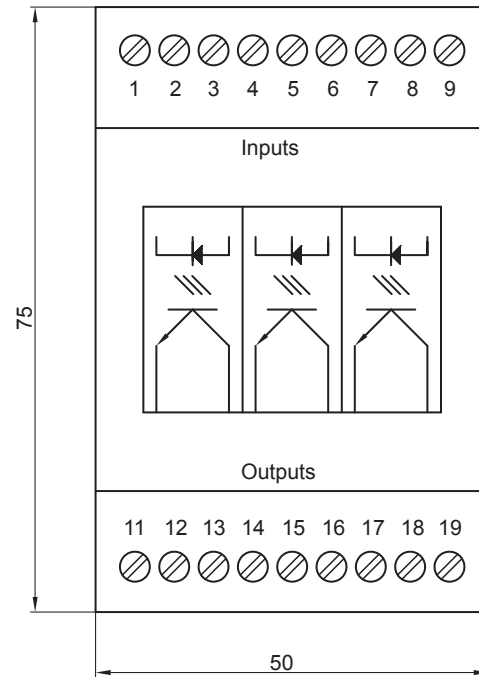

Height = 55

Output signals

